

GLSV-050 series

50W Constant Voltage Power Supply



Features:

- Constant voltage design
- Built-in active PFC function
- Universal AC input / Full range up to 305VAC
- Protections: Short Circuit / Over Voltage / Over Current
- Surge immunity: Differential Mode – 5kV, Common Mode - 10kV
- Cooling by free air convection
- IP67 design for indoor and outdoor applications

Application:

- Landscape lighting
- Linear lighting
- Industrial lighting



© MODEL INFORMATION

Model Number	Output Power [W]	Output Voltage [V]	Output Current [A]	Efficiency typ. [%]	Power Factor typ.
GLSV-050B012	50.04	12	4.17	85%	0.96
GLSV-050B024	49.92	24	2.08	88%	0.96
GLSV-050B036	50.04	36	1.39	88%	0.96
GLSV-050B048	49.92	48	1.04	89%	0.96

© APPROVAL MARKS and SYMBOLS

GLSV-050B012	CE	RoHS	IP67	SELV	tc: 85°C ta: 60°C	TUV SUD
GLSV-050B024	CE	RoHS	IP67	SELV	tc: 85°C ta: 60°C	TUV SUD
GLSV-050B036	CE	RoHS	IP67	SELV	tc: 85°C ta: 60°C	TUV SUD
GLSV-050B048	CE	RoHS	IP67	SELV	tc: 85°C ta: 60°C	TUV SUD

© MODEL ENCODING

GLSV	-	050	B	xxx
Series name		Rated Output Power [W]	Option name	012 - rated output voltage is 12V 024 - rated output voltage is 24V 036 - rated output voltage is 36V 048 - rated output voltage is 48V

GLSV-050 series

50W Constant Voltage Power Supply



© ELECTRICAL SPECIFICATION

MODEL	GLSV-050B012	GLSV-050B024	GLSV-050B036	GLSV-050B048
OUTPUT				
OUTPUT VOLTAGE	12VDC	24VDC	36VDC	48VDC
NO LOAD VOLTAGE (MAX.)	14VDC	26VDC	38VDC	50VDC
LOAD CURRENT RANGE	0 ÷ 4.17A	0 ÷ 2.08A	0 ÷ 1.39A	0 ÷ 1.04A
RATED POWER	50.05W	49.92W	50.05W	49.92W
OUTPUT VOLTAGE PRECISION	± 5.0%			
LINE REGULATION (FROM 115VAC TO 305VAC)	± 3.0%			
LOAD REGULATION (FROM 50% TO 100% LOAD)	± 3.0%			
OUTPUT VOLTAGE RIPPLE	< 3% v _{OUT}		< 2% v _{OUT}	
TURN-ON DELAY TIME	3s for 100% load			

INPUT				
VOLTAGE RANGE	90 ÷ 305VAC			
FREQUENCY RANGE	47 ÷ 63Hz			
EFFICIENCY AT 100% LOAD (TYP.)	85%	88%	89%	89%
	Refer to Efficiency vs. Output Load Curve			
AC CURRENT (MAX.)	0.8A			
INRUSH CURRENT (MAX.)	75A / 230VAC			
LEAKAGE CURRENT (MAX.)	0.75mA/230VAC			
POWER FACTOR (TYP.)	0.96 / 230VAC at 100% load (Refer to Power Factor vs. Output Load Curve)			
THD	< 15% / 230VAC at 70-100% load (Refer to THD vs. Load Curve)			

PROTECTIONS				
SHORT CIRCUIT	Type: decrease of input power, auto-recovery.			
OVER VOLTAGE	13.2 ± 18VDC	26.4 ± 36VDC	39.6 ± 54VDC	52.8 ± 72VDC
	Type: shut off output voltage, restart on to recovery.			
OVER CURRENT	100-160% rated output current			
	Type: hiccup mode, auto-recovery.			

WORKING ENVIRONMENT	
WORKING TEMPERATURE	-40°C ÷ 70°C (Refer to Derating Curve)
WORKING HUMIDITY	20 ÷ 95% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 20 ÷ 95% RH non-condensing
VIBRATION	10 to 500Hz sweep at constant acceleration 1G (depth 3.5mm) for 1 hour for each X, Y, Z axes
DEGREE OF PROTECTION	[2] IP67

GLSV-050 series

50W Constant Voltage Power Supply



SAFETY AND EMC REGULATIONS

SAFETY STANDARDS	CB	IEC61347-1; IEC61347-2-13
	CE	EN61347-1; EN61347-2-13
EMC STANDARDS	CE	EN55015; IEC61000-3-2; IEC61000-3-3; IEC61547
WITHSTAND VOLTAGE	IN/OUT: 3.75kVAC; IN/GND: 1.6kVAC; OUT/GND: 1.6kVAC; 60s, current < 10mA	
GROUNDING RESISTANCE	< 0.1Ω (60S/25A)	
INSULATION RESISTANCE	IN/OUT, IN/GND, OUT/GND > 100MΩ (500VDC/60s)	


OTHERS

Input Wire	H05RN-F 3 x 1.0mm ² , length = 300 ± 10mm
Output Wire	H05RN-F 2 x 1.0mm ² , length = 300 ± 10mm
MTBF	200 000h at 230VAC / 80% load and ta < 25°C
Life Time (min.)	50 000h at 230VAC / 100% load and tc < 70°C (Refer to Life Time vs. T _c Curve)
Dimensions (Length * Width x Height)	199 * 42.5 * 34mm
Weight	510 ± 50g

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Suitable for indoor or outdoor use. Please avoid direct exposure to sunlight and immersion in water for over 30 minutes.
3. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC and LVD Directives.

© MECHANICAL SPECIFICATION

GLSV-050 series

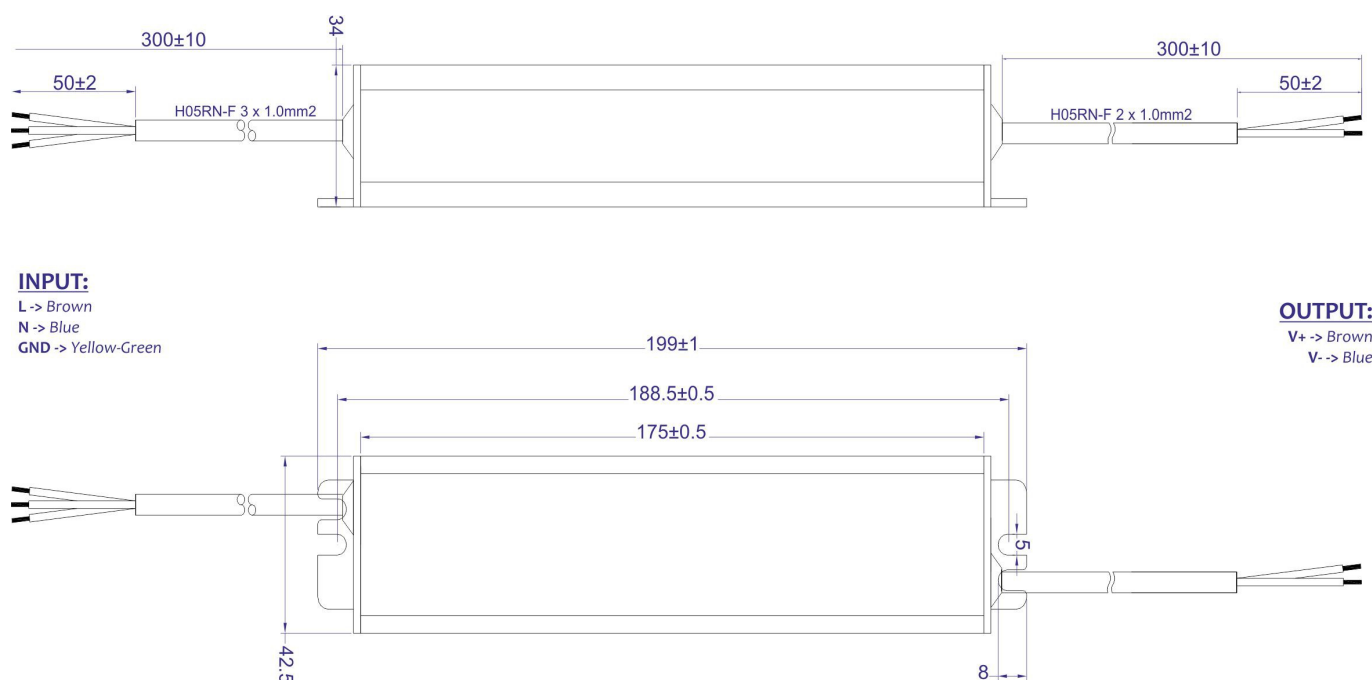


GLSV-050 series

50W Constant Voltage Power Supply




© Power Factor vs. Load Curve


GLSV-050B012

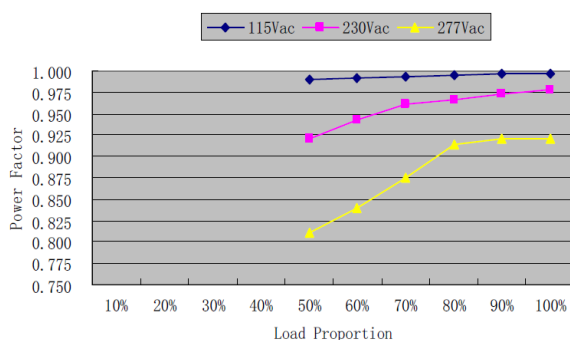


GLSV-050B024

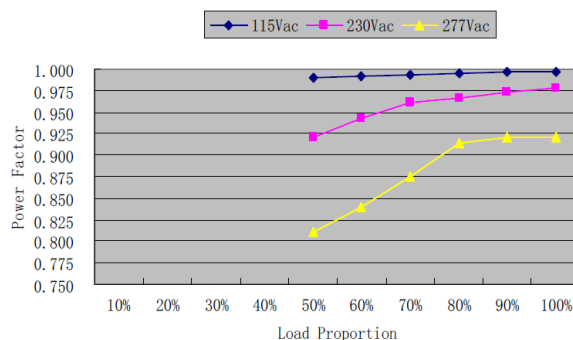

GLSV-050B036

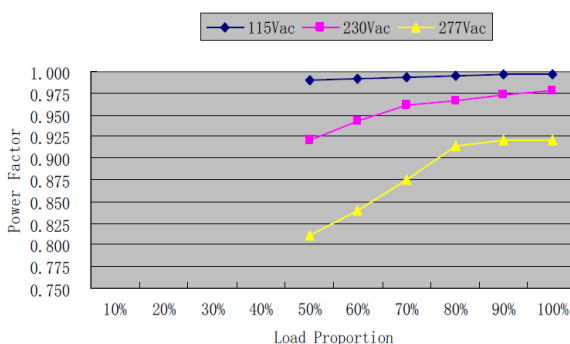


GLSV-050B048

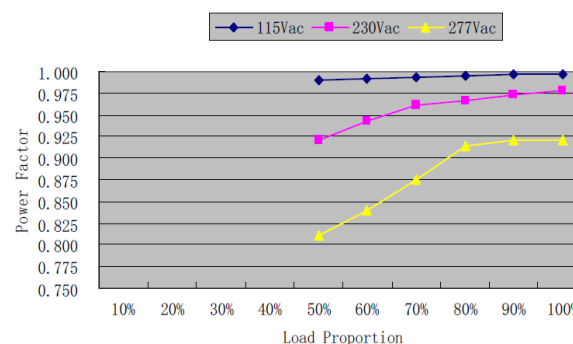


© Efficiency vs. Load Curve


GLSV-050B012

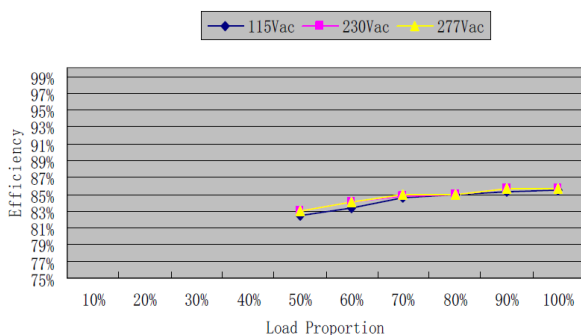


GLSV-050B024

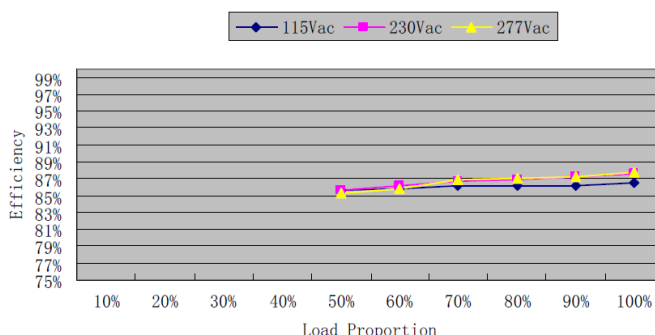

GLSV-050B036

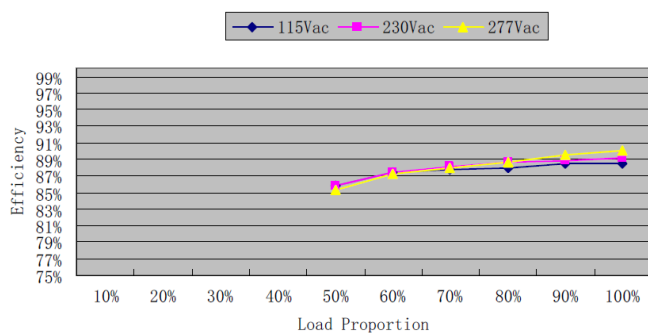

GLSV-050B048

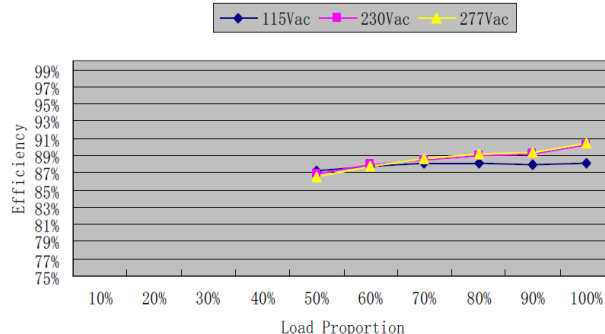


GLSV-050 series


50W Constant Voltage Power Supply




© Derating Curve

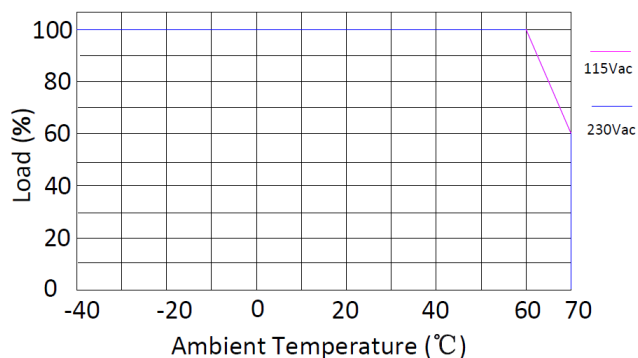

© Input Voltage vs. Load Curve

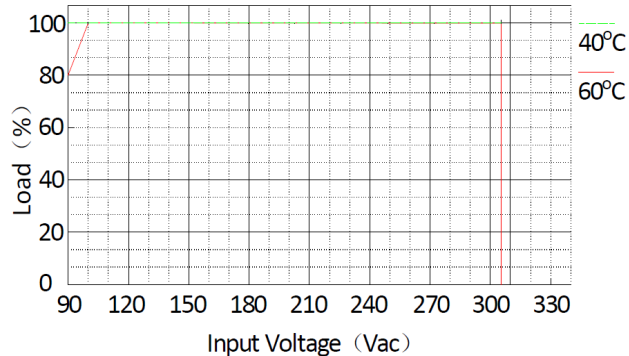

© Life time vs. T_c curve

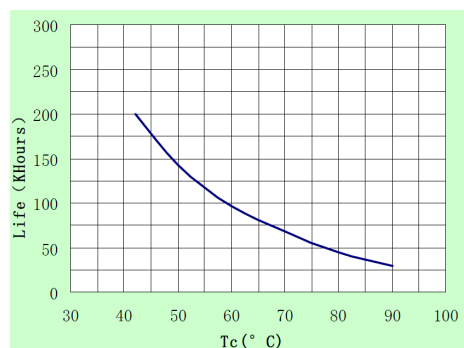

© Inrush Current Waveform

